

FIG. 1A

```
au = SilentDownload.find("CoolSoftware")
if (au == null)
{
    au = new SilentDownloadTask();
    au.Init("CoolSoftware",
        "http://home.foo.com/download/5.1/SilentDownload.jar",
        "http://home.foo.com/download/5.1/SilentDownload.html");
}
switch (au.state)
{
    case SilentDownloadTask.SDL_ERROR:
        au.Remove();
        break;
    case SilentDownloadTask.SDL_COMPLETE:
        au.Remove();
    // open the downloaded jar file; which puts up the
    // UI and does the install break;
}
```

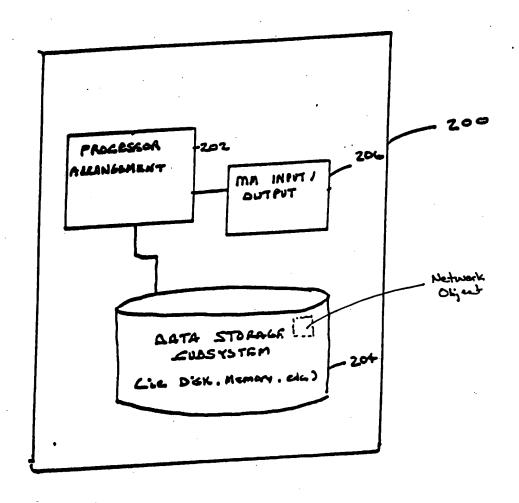


FIGURE 2

F16.4